

MIKADO ZERO™

SUSPENSION SYSTEM

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

MIKADO
ZERO

design_Filippo Mambretti

Customizable lighting system. After the award-winning version of the Mikado collection, we have created the new “Mikado Zero” version. A new way of conceiving space and a new design approach thanks to the infinite configurations of ceiling and wall lighting sources that create linear or geometric patterns offering a great scenic effect. Available with a range of ceiling plates that enable solutions featuring 2 to 10 aluminum elements with 2700K and 3000K LEDs, with or without frosted glass. The entire collection is supplied in a dimmable version.

SCANGIFT®

WWW.SCANGIFT.COM


MIKADO ZERO™

SUSPENSION SYSTEM

TYPE:

PROJECT NAME:

Page 2 and 3 show composition suggestions with relevant canopy.
 For details on cable lengths, diffuser, and finish options, see page 4.
 All compositions come standard with dimmable driver.




MIKADO ZERO SO 2 GLASS DIM PD

2 x 3,2W 710 Lm 3000K Cri>80 120V
 2 x 3,2W 670 Lm 2700K Cri>80 120V
 with push dimmable driver 120V



LED





MIKADO ZERO SO 2 DIM PD

2 x 3,2W 710 Lm 3000K Cri>80 120V
 2 x 3,2W 670 Lm 2700K Cri>80 120V
 with push dimmable driver 120V



LED





MIKADO ZERO SO 3 GLASS DIM PD

3 x 3,2W 1065 Lm 3000K Cri>80 120V
 3 x 3,2W 1005 Lm 2700K Cri>80 120V
 with push dimmable driver 120V



LED





MIKADO ZERO SO 3 DIM PD

3 x 3,2W 1065 Lm 3000K Cri>80 120V
 3 x 3,2W 1005 Lm 2700K Cri>80 120V
 with push dimmable driver 120V



LED





MIKADO ZERO SO 4 GLASS DIM PD

4 x 3,2W 1420 Lm 3000K Cri>80 120V
 4 x 3,2W 1340 Lm 2700K Cri>80 120V
 with push dimmable driver 120V



LED





MIKADO ZERO SO 4 DIM PD

4 x 3,2W 1420 Lm 3000K Cri>80 120V
 4 x 3,2W 1340 Lm 2700K Cri>80 120V
 with push dimmable driver 120V



LED





MIKADO ZERO SO 5 GLASS DIM PD

5 x 3,2W 1775 Lm 3000K Cri>80 120V
 5 x 3,2W 1675 Lm 2700K Cri>80 120V
 with push dimmable driver 120V



LED



MIKADO ZERO SO 5 DIM PD

5 x 3,2W 1775 Lm 3000K Cri>80 120V
 5 x 3,2W 1675 Lm 2700K Cri>80 120V
 with push dimmable driver 120V



LED



SPECIFICATION SHEET

MIKADO ZERO™

SUSPENSION SYSTEM

TYPE:

PROJECT NAME:





MIKADO ZERO SO 6 GLASS DIM PD

6 x 3,2W 2130 Lm 3000K Cri>80 120V
6 x 3,2W 2010 Lm 2700K Cri>80 120V
with push dimmable driver 120V



LED





MIKADO ZERO SO 6 DIM PD

6 x 3,2W 2130 Lm 3000K Cri>80 120V
6 x 3,2W 2010 Lm 2700K Cri>80 120V
with push dimmable driver 120V



LED





MIKADO ZERO SO 7 GLASS DIM PD

7 x 3,2W 2485 Lm 3000K Cri>80 120V
7 x 3,2W 2345 Lm 2700K Cri>80 120V
with push dimmable driver 120V



LED





MIKADO ZERO SO 7 DIM PD

7 x 3,2W 2485 Lm 3000K Cri>80 120V
7 x 3,2W 2345 Lm 2700K Cri>80 120V
with push dimmable driver 120V



LED





MIKADO ZERO SO 8 GLASS DIM PD

8 x 3,2W 2840 Lm 3000K Cri>80 120V
8 x 3,2W 2680 Lm 2700K Cri>80 120V
with push dimmable driver 120V



LED





MIKADO ZERO SO 8 DIM PD

8 x 3,2W 2840 Lm 3000K Cri>80 120V
8 x 3,2W 2680 Lm 2700K Cri>80 120V
with push dimmable driver 120V



LED





MIKADO ZERO SO 9 GLASS DIM PD

9 x 3,2W 3195 Lm 3000K Cri>80 120V
9 x 3,2W 3015 Lm 2700K Cri>80 120V
with push dimmable driver 120V



LED



MIKADO ZERO SO 9 DIM PD

9 x 3,2W 3195 Lm 3000K Cri>80 120V
9 x 3,2W 3015 Lm 2700K Cri>80 120V
with push dimmable driver 120V



LED

SPECIFICATION SHEET

SCANGIFT®




WWW.SCANGIFT.COM

MIKADO ZERO™

SUSPENSION SYSTEM

TYPE:

PROJECT NAME:

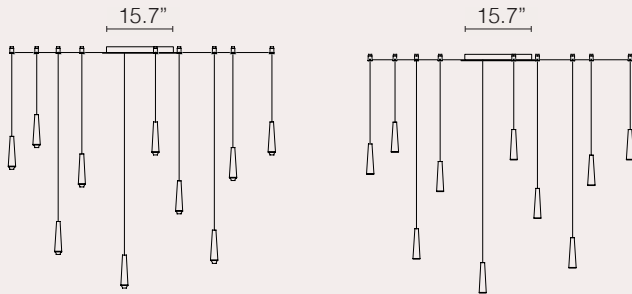

MIKADO ZERO SO 10 GLASS DIM PD

10 x 3,2W 3550 Lm 3000K Cri>80 120V
10 x 3,2W 3350 Lm 2700K Cri>80 120V
with push dimmable driver 120V



Frame: matt black metal or gold.

Diffuser: satin glass.



07: Matt Black




22: Matt Gold

MIKADO ZERO SO 10 DIM PD

10 x 3,2W 3550 Lm 3000K Cri>80 120V
10 x 3,2W 3350 Lm 2700K Cri>80 120V
with push dimmable driver 120V



DIFFUSER



Glass

Classic




STANDARD COMPOSITIONS

This table indicates the number of cables/anchors needed for each composition.

	Short cables 68.9"	Long cables 127"	Cable anchors
SO 2	N.2	N.0	N.2
SO 3	N.2	N.1	N.3
SO 4	N.2	N.2	N.4
SO 5	N.3	N.2	N.5
SO 6	N.4	N.2	N.6
SO 7	N.4	N.3	N.7
SO 8	N.5	N.3	N.8
SO 9	N.6	N.3	N.9
SO 10	N.6	N.4	N.10

For example, the standard SO10 composition requires 6 short cables, 4 long cables, and 10 anchors. However, these are only suggestions; you can select different combinations of cables and anchors as desired.

Customized Composition Examples

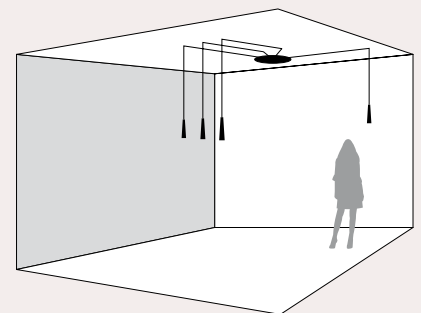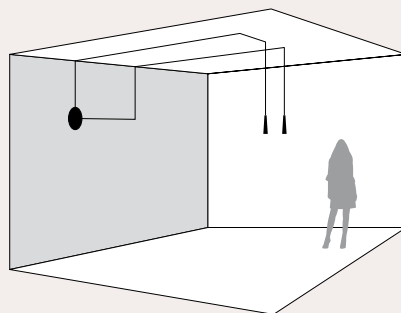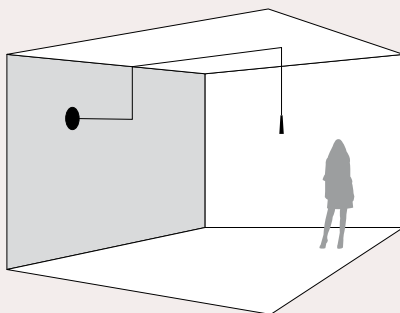

SPECIFICATION SHEET