



INSTALLATION INSTRUCTIONS

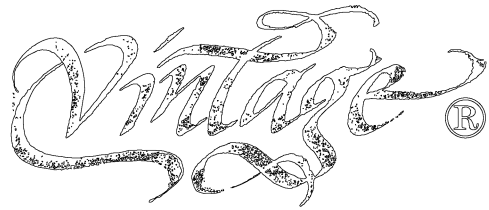

LIMELIGHT 12.4 - 28.6
suspension

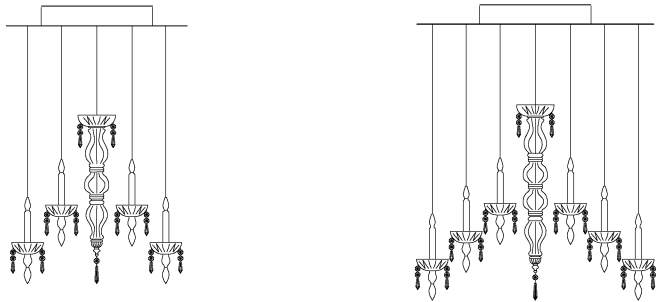

Warning:

Before proceeding with the assembly operation, disconnect the electrical supply at the fuseboard.

4 x MAX 40W HSGST/C GU10
4 x SUITABLE FOR LED LAMPS
120V 50-60 Hz

6 x MAX 40W HSGST/C GU10
6 x SUITABLE FOR LED LAMPS
120V 50-60 Hz

FOLLOW THE ASSEMBLY INSTRUCTIONS IN NUMERICAL ORDER. CANOPY OF THE LIMELIGHT IS INSTALLED SURFACE MOUNTED TO CEILING AND WIRING CONNECTED TO A STANDARD JUNCTION BOX AND SHOULD BE REINFORCED WITH ADDITIONAL SCREW ANCHORS.

