



**B**

Lamping: 2W LED Bipin  
Driver: 120V Remote Driver



**A**

### Installation Instructions


1. Insert the light source (A)
2. Screw in the glass shade (B)
3. Insert fixture into ground with spike (C)
4. Connect wire (D) to driver. Below are two wiring options.




**C**

### WIRING DIAGRAM

OPTION 1:

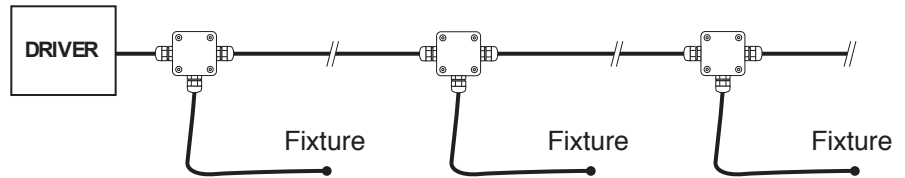

OPTION 2:

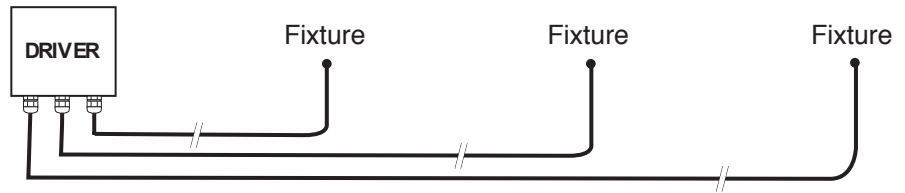

**D**

