


# I-SNAP F1, F2

## INSTALLATION INSTRUCTIONS

TYPE:

PROJECT NAME:

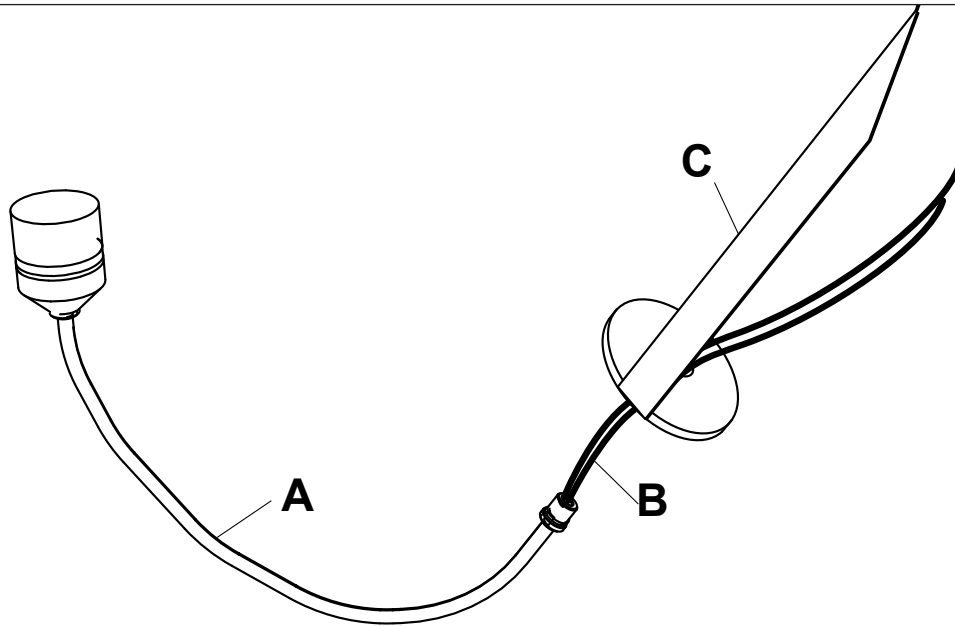


Driver: 120V Remote Driver

### Installation Instructions

1. Unpack the lamp and unfold the copper tube (A)
2. Pass the cables (B) through the hole in the spike (C)
3. Connect the copper tube (A) to the spike (C)
4. Insert fixture into ground with spike (C)
5. Connect wires to driver. Below are two wiring options

### WIRING DIAGRAM

OPTION 1:

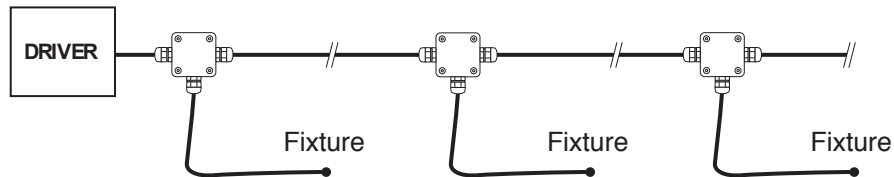

OPTION 2:

