

# BOOMERANG™ LED

design M. Pagnoncelli - M. Duse - Studio Righetto



SPECIFICATION SHEET

SCANGIFT®



WWW.SCANGIFT.COM


Lampada a parete in alluminio pressofuso a luce indiretta. A LED 220V senza alimentatore e ad alogena. Finiture: bianco laccato a liquido (BI), alluminio (A), alluminio lucidato a panno (AL).

Indirect light pressure die-cast aluminium wall lamp. Halogen 220 V LED without power supply. Finishes: white liquid enamel (BI), aluminium (A), buffed aluminium (AL).



PROJECT:

TYPE:

MODEL # FINISH WATT LED COLOUR HOUSING POWER SUPPLY VOLTAGE

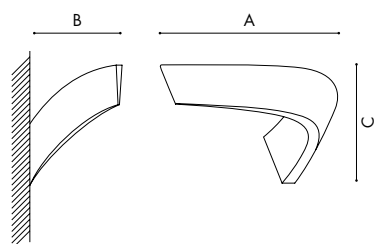

Classe energetica. Energy class.

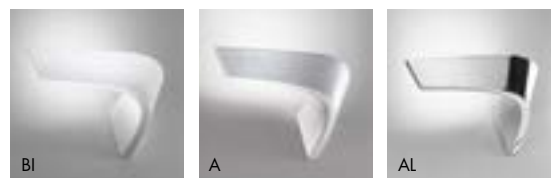

Art.	W	V	Attacco/Socket	Lumen	° K Led	A cm	B cm	C cm
BOOMERANG <b>AP23</b>	23	220	LED	2400	3000	32	16,5	20
BOOMERANG <b>AP</b>	1x250	220	R7S 118mm	-	-	32	16,5	20

Voltage options: 120V, 220V, 277V

