

Suspension

PROJECT NAME:

MODEL #

SHADE COLOR

FIXTURE HEIGHT

HALO

LED

VOLTAGE

120V




SHADE OPTIONS

ST = STANDARD BRM



SPECIFICATION SHEET

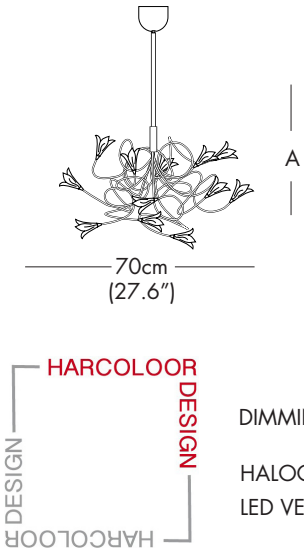

MODEL - BREEZE HL 7

LIGHT SOURCE OPTIONS

H = HALOGEN - 7 x 10W 12V G4
or
L = LED - 7 x 1.5W 12V 2700K WW
100 Lumens each LED 30,000 hours

FIXTURE HEIGHT OPTIONS (A)

32 = 32"
44 = 44"
56 = 56"
CH = Custom height available. Please contact our office.
NOTE 1: Suspension Rod is not field cuttable.
NOTE 2: Height stated above may vary + - 1" - 4" due to the fixture arms can be adjusted slightly as the fixture is hand made and organic in shape.

DIMMING NOTE:


HALOGEN VERSION - Dimmable with a Low-Voltage Electronic dimmer.
LED VERSION - Dimmable with a leading edge or trailing edge TRIAC dimmer.

MODEL #	SHADE COLOR	FIXTURE HEIGHT	HALO	LED	VOLTAGE
					120V



SHADE OPTIONS

ST = STANDARD BRM



MODEL - BREEZE HL 9


LIGHT SOURCE OPTIONS

H = HALOGEN - 9 x 10W 12V G4
or
L = LED - 9 x 1.5W 12V 2700K WW
100 Lumens each LED 30,000 hours

FIXTURE HEIGHT OPTIONS (A)

32 = 32"
44 = 44"
56 = 56"

CH = Custom height available. Please contact our office.
NOTE 1: Suspension Rod is not field cuttable.
NOTE 2: Height stated above may vary + - 1" - 4" due to the fixture arms can be adjusted slightly as the fixture is hand made and organic in shape.



MODEL - BREEZE HL 12


LIGHT SOURCE OPTIONS

H = HALOGEN - 12 x 10W 12V G4
or
L = LED - 12 x 1.5W 12V 2700K WW
100 Lumens each LED 30,000 hours

FIXTURE HEIGHT OPTIONS (A)

32 = 32"
44 = 44"
56 = 56"

CH = Custom height available. Please contact our office.
NOTE 1: Suspension Rod is not field cuttable.
NOTE 2: Height stated above may vary + - 1" - 4" due to the fixture arms can be adjusted slightly as the fixture is hand made and organic in shape.



MODEL - BREEZE HL 15

LIGHT SOURCE OPTIONS

H = HALOGEN - 15 x 10W 12V G4
or
L = LED - 15 x 1.5W 12V 2700K WW
100 Lumens each LED 30,000 hours

FIXTURE HEIGHT OPTIONS (A)

32 = 32"
44 = 44"
56 = 56"

CH = Custom height available. Please contact our office.
NOTE 1: Suspension Rod is not field cuttable.
NOTE 2: Height stated above may vary + - 1" - 4" due to the fixture arms can be adjusted slightly as the fixture is hand made and organic in shape.

DIMMING NOTE:

HALOGEN VERSION - Dimmable with a Low-Voltage Electronic dimmer.
LED VERSION - Dimmable with a leading edge or trailing edge TRIAC dimmer.

						120V
MODEL #	SHADE COLOR	FIXTURE HEIGHT	HALO	LED		VOLTAGE



SHADE OPTIONS

ST = STANDARD BRM



MODEL - BREEZE HL 20


LIGHT SOURCE OPTIONS

H = HALOGEN - 20 x 10W 12V G4
or
L = LED - 20 x 1.5W 12V 2700K WW
100 Lumens each LED 30,000 hours

FIXTURE HEIGHT OPTIONS (A)

32 = 32"
44 = 44"
56 = 56"

CH = Custom height available. Please contact our office.
NOTE 1: Suspension Rod is not field cuttable.
NOTE 2: Height stated above may vary + - 1" - 4" due to the fixture arms can be adjusted slightly as the fixture is hand made and organic in shape.



MODEL - BREEZE HL 30


LIGHT SOURCE OPTIONS

H = HALOGEN - 30 x 5W 12V G4
or
L = LED - 30 x 1.5W 12V 2700K WW
100 Lumens each LED 30,000 hours

FIXTURE HEIGHT OPTIONS (A)

32 = 32"
44 = 44"
56 = 56"

CH = Custom height available. Please contact our office.
NOTE 1: Suspension Rod is not field cuttable.
NOTE 2: Height stated above may vary + - 1" - 4" due to the fixture arms can be adjusted slightly as the fixture is hand made and organic in shape.



MODEL - BREEZE HL 40


LIGHT SOURCE OPTIONS

H = HALOGEN - 40 x 5W 12V G4
or
L = LED - 40 x 1.5W 12V 2700K WW
100 Lumens each LED 30,000 hours

FIXTURE HEIGHT OPTIONS (A)

32 = 32"
44 = 44"
56 = 56"

CH = Custom height available. Please contact our office.
NOTE 1: Suspension Rod is not field cuttable.
NOTE 2: Height stated above may vary + - 1" - 4" due to the fixture arms can be adjusted slightly as the fixture is hand made and organic in shape.



DIMMING NOTE:

HALOGEN VERSION - Dimmable with a Low-Voltage Electronic dimmer.
LED VERSION - Dimmable with a leading edge or trailing edge TRIAC dimmer.

BREEZE™

TYPE:

Suspension

PROJECT NAME:

MODEL #

SHADE COLOR

FIXTURE HEIGHT

HALO

LED


120V

VOLTAGE



SHADE OPTIONS

ST = STANDARD BRM



MODEL - BREEZE HL 50

LIGHT SOURCE OPTIONS

H = HALOGEN - 50 x 5W 12V G4

or

L = LED - 50 x 1.5W 12V 2700K WW

100 Lumens each LED 30,000 hours

FIXTURE HEIGHT OPTIONS (A)

$$32 = 32''$$
$$44 = 44''$$
$$56 = 56''$$

CH = Custom height available. Please contact our office.

NOTE 1: Suspension Rod is not field cuttable.

NOTE 2: Height stated above may vary + - 1" - 4" due to the fixture arms can be adjusted slightly as the fixture is hand made and organic in shape.

SPECIFICATION SHEET

The logo for HARCOLOOR DESIGN is located in the bottom right corner. It features the word "HARCOLOOR" in a grey, sans-serif font, with "DESIGN" in a red, sans-serif font to its right. A thin grey line connects the two words, forming a partial frame.

DIMMING NOTE:

HALOGEN VERSION - Dimmable with a Low-Voltage Electronic dimmer.

LED VERSION - Dimmable with a leading edge or trailing edge TRIAC dimmer.

A SCANGIFT® BRAND

—WWW.HARCOLOORLIGHTING.COM